


TYPE 85 EPDM RUBBER SHEET

- COMMERCIAL GRADE
- HIGH GRADE
- 100% EPDM

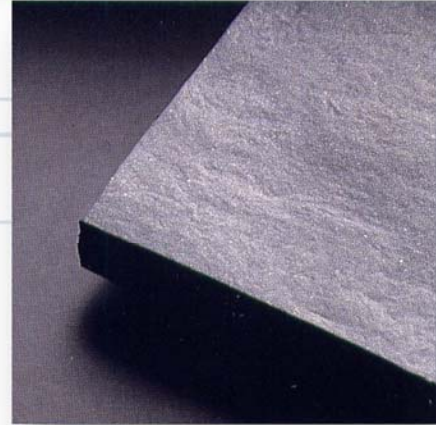

COLOR: BLACK

FEATURES: THIS SHEET IS AN ETHYLENE PROPYLENE DISPLAYING EXCELLENT RESISTANCE TO OZONE, OXYGEN AND WATER.

EQUIPMENT: MATING FLANGES, BOILER MANHOLE AND HANDHOLD FLANGES.

REMARKS: AN EXCELLENT LOW COST MATERIAL FOR BOILER GASKETS.

GRADES

TYPE 85C - COMMERCIAL GRADE: TEMPERATURES FROM -40°F TO 212°F.

TYPE 85H - HIGH GRADE: TEMPERATURES FROM -40°F TO 225°F.

TYPE 85100 - 100% EPDM: TEMPERATURES FROM -55°F TO 300°F.

Durometer Hardness Shore A ±5	Tensile	Elongation	Specifications
40	1500	500	MICA 410, ASTM D 2000
50	1600	450	MICA 510, ASTM D 2000
60	1800	400	MICA 610, ASTM D 2000
70	1700	200	MICA 710, ASTM D 2000
80	1800	150	MICA 810, ASTM D 2000

PLEASE SPECIFY GRADE AND DUROMETER - EXAMPLE: SDS-12536-60-EPDM-C

Thickness	Widths	PART NUMBER:
1/16"	48"	SDS-06248-XX-EPDM-X
1/8"	48"	SDS-12548-XX-EPDM-X
3/16"	48"	SDS-18748-XX-EPDM-X
1/4"	48"	SDS-25048-XX-EPDM-X